


Key Features


- WFHD 2560 x 1080 resolution
- SuperClear® IPS panel
- 21:9 aspect ratio
- 3-side borderless bezel
- Adaptive sync 75Hz to eliminate screen tearing & reduce stuttering



Product **Description**

The ViewSonic® VA2932-MHD is a 29" monitor with WFHD2560 x 1080 resolution, 21:9 aspect ratio, and SuperClear® IPS panel. And with SuperClear® IPS technology, this monitor delivers the same image quality whether you are looking at the screen from above, below, the front, or the side. A 21:9 aspect ratio and 3-side borderless bezels provide extra screen real estate so users can display more content, switch between applications more quickly, view documents side by side, and view multiple windows at once.

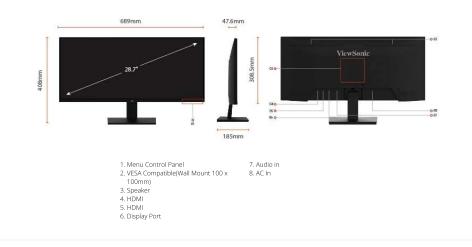



29 28.7 IPS Technology 2560 x 1080 WFHD (Wide FHD+) 1,000:1 (typ) 80M:1 LED 250 cd/m ² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync Yes	Frequency Horizontal: Frequency Vertical: VIDEO INPUT Digital Sync: ERGONOMICS Tilt (Forward/Back): WEIGHT (IMPERIAL) Net (lbs): Net Without Stand (lbs): Gross (lbs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (WE Packaging (in.): Bhyging (in.):	24 ~ 86KHz 48 ~ 75Hz TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.4) -5° / 20° 9.5 8.1 12.9 4.3 3.7 5.9 XHXD)
IPS Technology 2560 x 1080 WFHD (Wide FHD+) 1,000:1 (typ) 80M:1 LED 250 cd/m² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	VIDEO INPUT Digital Sync: ERGONOMICS Tilt (Forward/Back): WEIGHT (IMPERIAL) Net (lbs): Net (lbs): Net Without Stand (lbs): Gross (lbs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.4) -5° / 20° 9.5 8.1 12.9 4.3 3.7 5.9
2560 x 1080 WFHD (Wide FHD+) 1,000:1 (typ) 80M:1 LED 250 cd/m ² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Digital Sync: ERGONOMICS Tilt (Forward/Back): WEIGHT (IMPERIAL) Net (Ibs): Net Without Stand (Ibs): Gross (Ibs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (WE Packaging (in.):	DisplayPort (v1.4) -5° / 20° 9.5 8.1 12.9 4.3 3.7 5.9
WFHD (Wide FHD+) 1,000:1 (typ) 80M:1 LED 250 cd/m ² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	ERGONOMICS Tilt (Forward/Back): WEIGHT (IMPERIAL) Net (Ibs): Net Without Stand (Ibs): Gross (Ibs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (WE Packaging (in.):	DisplayPort (v1.4) -5° / 20° 9.5 8.1 12.9 4.3 3.7 5.9
1,000:1 (typ) 80M:1 LED 250 cd/m ² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Tilt (Forward/Back): WEIGHT (IMPERIAL) Net (lbs): Net Without Stand (lbs): Gross (lbs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	9.5 8.1 12.9 4.3 3.7 5.9
80M:1 LED 250 cd/m ² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	WEIGHT (IMPERIAL) Net (lbs): Net Without Stand (lbs): Gross (lbs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	9.5 8.1 12.9 4.3 3.7 5.9
LED 250 cd/m ² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Net (lbs): Net Without Stand (lbs): Gross (lbs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	8.1 12.9 4.3 3.7 5.9
250 cd/m² (typ) 16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Net Without Stand (lbs): Gross (lbs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	8.1 12.9 4.3 3.7 5.9
16.7M 8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Gross (lbs): WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	12.9 4.3 3.7 5.9
8 bit (6 bit + FRC) 21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	WEIGHT (METRIC) Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	4.3 3.7 5.9
21:9 4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Net (kg): Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	3.7 5.9
4ms 178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Net Without Stand (kg): Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	3.7 5.9
178° horizontal, 178° vertical 30000 Hrs (Min) Flat 75 FreeSync	Gross (kg): DIMENSIONS (IMPERIAL) (W Packaging (in.):	5.9
30000 Hrs (Min) Flat 75 FreeSync	DIMENSIONS (IMPERIAL) (W Packaging (in.):	
Flat 75 FreeSync	Packaging (in.):	XHXD)
75 FreeSync		
FreeSync	Physical (in):	31.2 x 16.6 x 4.8
	Physical (in.):	27.1 x 16.1 x 7.3
	Physical Without Stand (in.):	27.1 x 12.1 x 1.9
Yes	DIMENSIONS (METRIC) (WX	HXD)
	Packaging (mm):	792 x 422 x 122
Yes	Physical (mm):	689 x 408 x 185
NTSC: 85% size (Typ) sRGB: 120% size (Typ)	Physical Without Stand (mm):	689 x 309 x 48
0.263 mm (H) x 0.263 mm (V)	GENERAL	
Anti-Glare, Hard Coating (3H)	Regulations:	RoHS, WEEE, VCCI, PSE, KC,
	rtogulations.	e-Standby, BIS
2560x1080	PACKAGE CONTENTS:	VA2932-MHD x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-
2560x1080		Male) x1, Quick Start Guide x1
Windows 10/11 certified; macOS	Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
tested		*Warranty offered may differ from
2560x1080	Warranty:	market to market
	Country Of Origin:	48
1		
2		
1		
3-pin Socket (IEC C14 / CEE22)		
2Watts x2		
20W		
24W		
27W		
30W		
AC 100-240V		
0.5W		
Internal Power Supply		
1		
Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power)		
Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setun Menu		
32°E to 104°E (0°C to 40°C)		
20 /0 10 90 /0		
	2 1 3-pin Socket (IEC C14 / CEE22) 2Watts x2 20W 24W 27W 30W AC 100-240V 0.5W Internal Power Supply 1 Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode,	2 1 3-pin Socket (IEC C14 / CEE22) 2Watts x2 20W 24W 27W 30W AC 100-240V 0.5W Internal Power Supply 1 Key 1 (favorite), Key 2, Key 3, Key 4, Key 5, Key 6 (power) Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu 32°F to 104°F (0°C to 40°C) 20% to 90%

Copyright © ViewSonic Corporation 2000-2023. All rights reserved.