

ViewSonic® LCD DISPLAY VG2440V


Key Features

- Built-in Full HD webcam and microphone
- Adjustable vertical angles for greater frame control
- Webcam slide cover ensures total security and privacy
- Ergonomic flexibility with quick release stand
- Dual front-facing speakers



Product Description

The ViewSonic VG2440V is a 24" Full HD video conferencing monitor designed to deliver out-of-the-box video conferencing and high-quality live streaming capability. The built-in Full HD webcam allows you to easily adjust the vertical angles to better frame yourself during VC calls and create more engaging content through varied camera angles, while the easy-to-use cover slide ensures total privacy and security when not in use. Providing the full spectrum of ergonomic flexibility, the VG2440V can tilt, swivel, pivot, and height adjust to adapt to any setup or workflow, and the exceptional inbuilt microphones and dual front-facing speakers ensure you can hear and be heard with absolute clarity and professionalism. Combined with the vDisplay Manager productivity software for efficient multi-tasking and streamlined on-screen display control, the VG2440V is the complete solution for anybody looking for a professional live streaming or video communication experience.

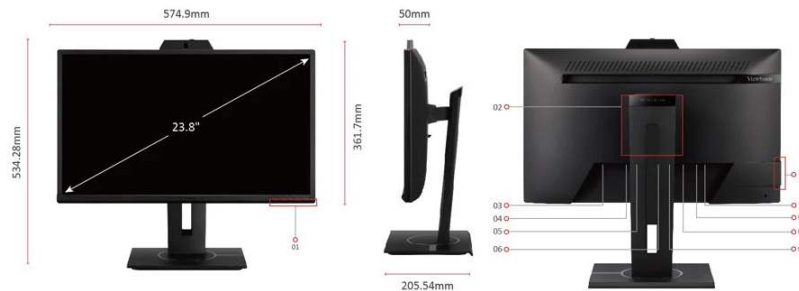

- | | |
|--|---------------------------------|
| 1. Menu Control Panel | 7. HDMI |
| 2. VESA Compatible(Wall Mount 100 x 100mm) | 8. D-Sub |
| 3. AC In | 9. USB 3.0 UP Stream(Type B) |
| 4. Line-in | 10. USB 3.0 Down Stream(Type A) |
| 5. Headphone | 11. USB 3.0 Down Stream(Type A) |
| 6. DP In | |

Visit Us

www.viewsonic.com

DISPLAY

Display Size (in.):	24
Viewable Area (in.):	23.8
Panel Type:	IPS Technology
Resolution:	1920 x 1080
Resolution Type:	FHD (Full HD)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
Light Source:	LED
Brightness:	250 cd/m ² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + Hi-FRC)
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Backlight Life (Hours):	30000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Blue Light Filter:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 72% size (Typ) sRGB: 104% size (Typ)
Pixel Size:	0.275 mm (H) x 0.275 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

COMPATIBILITY

PC Resolution (max):	1920x1080
Mac® Resolution (max):	1920x1080
PC Operating System:	Windows 7/8/8.1/10/11 certified; macOS tested
Mac® Resolution (min):	1920x1080

CONNECTOR

VGA:	1
USB 3.2 Type A Down Stream:	3
USB 3.2 Type B Up Stream:	1
3.5mm Audio In:	1
3.5mm Audio Out:	1
HDMI 1.4:	1
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	10.3W
Eco Mode (optimized):	11.71W
Consumption (typical):	13.68W
Consumption (max):	16.52W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	Internal Power Supply

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
Webcam:	2.0M pixel
Cable Organization:	Yes
Microphone:	Yes

CONTROLS

Physical Controls:	Key 1 (volume down), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display:	Input Select, Audio/Mic, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	RGB Analog: 16 ~ 83KHz, HDMI (v1.4): 15 ~ 90KHz, DisplayPort (v1.2): 15 ~ 90KHz
Frequency Vertical:	RGB Analog: 50 ~ 75Hz, HDMI (v1.4): 49 ~ 75Hz, DisplayPort (v1.2): 49 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2)
Analog Sync:	Separate/Composite/SOG - RGB Analog

ERGONOMICS

Height Adjust (mm):	130
Swivel:	120°
Tilt (Forward/Back):	-5° / 40°
Pivot (Right/Left):	90° / 90°

WEIGHT (IMPERIAL)

Net (lbs):	13.3
Net Without Stand (lbs):	7.9
Gross (lbs):	19.2

WEIGHT (METRIC)

Net (kg):	6
Net Without Stand (kg):	3.6
Gross (kg):	8.7

DIMENSIONS (IMPERIAL) (WXHxD)

Packaging (in.):	24 x 15.9 x 8.3
Physical (in.):	21.6 x 16.02~21.13 x 8.1
Physical Without Stand (in.):	21.6 x 13.8 x 2

DIMENSIONS (METRIC) (WXHxD)

Packaging (mm):	609 x 405 x 210
Physical (mm):	549 x 406.78~536.78 x 206
Physical Without Stand (mm):	549 x 352 x 50

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 9.0, EAC, UkrSEPRO, UKCA, RCM, GEMS, BIS
PACKAGE CONTENTS:	VG2440V x1, 3-pin Plug (IEC C13 / CEE22) x1, HDMI Cable (v1.4; Male-Male) x1, USB A/B Cable (v3.2; Male-Male) x1, Audio Cable (Male-Male) x1, Quick Start Guide x1
Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market
Power Management:	Energy Star standards, EPEAT